

## Gas Cylinder

*GB Series™*

Our chain and sprocket design is reliable, safe and lighter weight than cable and direct drive systems.



### Key Features

- Fence collapses with the platform using standard quick release pull pins to allow direct access to the cargo area
- Lightweight low incline aluminum ramp for easier loading and unloading of cylinders
- Advanced dock protection prevents damage caused by normal dock impact (3,000 and 4,000 lbs only)
- **Lifting capacity** - 1,250 - 4,000 lbs.
- **Applications** - pickup trucks, service bodies, flat beds, straight trucks and trailers





Steel bar grating - optional

Call 800-289-1335 in the U.S.  
416-421-7987 in Canada

Visit our web site: [www.ultronlift.com](http://www.ultronlift.com)

# Gas Cylinder Railgate Product Information

## Clearance and Lift Dimensions

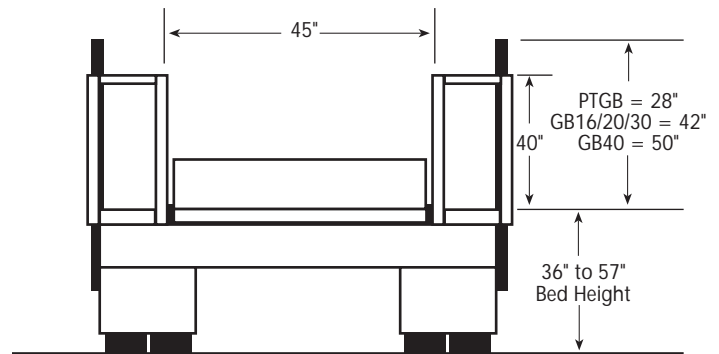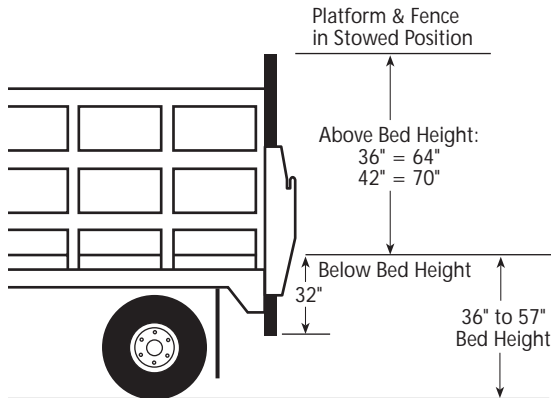

## Specifications

Model	Applications	Bed Height Min-Max"	Capacity lbs.	Shipping Wt. lbs.	Platform Area"	Ramp Area"	OA Rail Width"
PT16GB	A	25-46	1600	XX	** x 24	**	**
PT16GBAF <sup>†</sup>	A	25-46	1600	430	** x 24	**	**
GB16AF Hot Shot <sup>†</sup>	C,D,E,F	36-57	1600	750	87 x 30	42 x 14	94
DM16	G	18-57	1600	650	89 x 36	6	94
GB2030	C,D,E,F	36-57	2000	785	87 x 30	42 x 14	94
GB2030AF <sup>†</sup>	C,D,E,F	36-57	2000	830	87 x 30	42 x 14	94
GB3036*	B,C,D,E	36-57	3000	1,210	89 x 36	42 x 20	95
GB3042*	B,C,D,E	36-57	3000	1,255	89 x 42	42 x 20	95
GB4036*	B,C,D,E	36-57	4000	1,385	89 x 36	42 x 20	95
GB4042*	B,C,D,E	36-57	4000	1,425	89 x 42	42 x 20	95

(A) Pickup Trucks (B) Trailers (C) Straight Trucks (D) Flatbeds (E) Rack Bodies (F) Hot Shot Delivery Trucks (G) Dock Applications

<sup>†</sup> Denotes models with above floor lift. Bed height maximum minus actual truck bed height = platform lift above floor

\* Hydraulic Power open and close

\*\* Platform width, ramp area and rail width will vary with make and model of truck

Offset ramp

## Standard Features

- Three year warranty
- Same day parts service
- Box fully encloses power unit
- Master disconnect switch and 135 amp circuit breaker
- Weather sealed electric controls are easier and safer than mechanical controls
- Pressure compensated flow control valve controls platform descent regardless of load weight



Authorized Distributor

E-mail: [info@ultronlift.com](mailto:info@ultronlift.com) • Web: [www.ultronlift.com](http://www.ultronlift.com)

**Ultron Lift Corp.**  
 190 Lewis Street • PO Box 6126  
 Buffalo, NY 14240-6126 USA  
 Phone: 800-289-1335  
 716-853-7994  
 Fax: 716-854-5424

**Ultron Lift Inc.**  
**Les Hayons Ultron Inc.**  
 12 Industrial Street  
 Toronto, ON M4G 1Y9 Canada  
 Phone: 416-421-7987  
 Fax: 416-421-7927